



LYG FAMOUS GROUP CO., LTD

Contact details

Sale Manager: **Allen Song**

WhatsApp/Phone/Wechat : **+8618861515646**

Email: allen@ysfamous.com

Web: www.ysfamous.com

YB-150K/YB-150SK 全自动颗粒包装机 Automatic Granule Packing Machine



用途: 该机主要用于包装无粘性、大小均匀的颗粒类产品：如糖、盐、咖啡、调味料、花生、瓜子、谷物、麦片、茶叶、中草药、洗衣粉、干燥剂等。

性能特点:

- 1、工作流程：量杯计量→打码（选配）→制袋→灌装→充气/排气（选配）→封口→计数。
- 2、电脑/PLC控制，光电跟踪，设有故障显示系统，便于操作和维修。
- 3、根据客户需要可订做打圆孔刀座、连包装置、易撕口装置等。
- 4、整机外壳和接触物料部分由不锈钢材料制作（量杯材质：尼龙/不锈钢）。

Usage:

This machine is mainly used for packaging non-sticky, uniform size of the granular products: such as sugar, salt, coffee, seasoning, peanuts, sunflower seeds, grains, cereals, tea, herbs, washing powder, desiccants, etc.

Function and features:

1. Workflow: cup volumetric filler measuring→coding (optional)→bag making→filling→gas injection/exhaust (optional)→sealing→counting.
2. Computer/PLC control, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Can make hole punching blade (round/euro hole), linked bags device or easy tear notch device and so on according to customer's request.
4. Machine body and all product touching parts are made of stainless steel (measuring cup material: nylon/stainless steel).

技术参数/Technical parameter:

型号/Model	YB-150K	YB-150SK
包装速度/Packing speed	30-80 bags/min	60-160 bags/min
包装范围/Packing range	5-200ml	5-200ml
膜宽/Film width	≤ 280mm	≤ 280mm
制袋尺寸/Making bag size	L: 50-150mm, W: 15-130mm	L: 50-150mm, W: 15-130mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)	≤ ± 1% (根据物料而定/depends on product)
功率/Power	1.6 KW	3.2 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	260kg	520kg
机器尺寸/Machine dimension	L900 × W680 × H1800mm	L1800 × W680 × H1800mm

YB-150LD 链斗式包装机 Bucket Type Packing Machine



用途: 该机主要用于包装大颗粒/片状/不规则产品: 如饼干、薯片、水饺、速冻丸子、豆芽菜、香菇、肉类、五金配件等。

性能特点:

- 1、工作流程: 手工将准备好的产品放入链斗→输送→打码 (选配) →制袋→灌装→充气/排气 (选配) →封口→计数。
- 2、电脑/PLC控制, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、根据客户需要可订做打孔刀座、连包装置、易撕口装置等。
- 4、整机外壳和接触物料部分由不锈钢材料制作 (链斗材质: 食品级塑料/不锈钢)。

Usage:

The machine is mainly used for packaging large particles/flaky/irregular shape products: such as biscuits, potato chips, dumplings, quick-frozen balls, bean sprouts, mushrooms, meat, hardware accessories and so on.

Function and features:

1. Workflow: Put prepared product into the chain bucket manually→conveying→coding (optional)→bag making →filling→gas injection/exhaust (optional)→sealing→counting.
2. Computer/PLC control, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Can make hole punching blade, linked bags device or easy tear notch device and so on according to customer's request.
4. Machine body and all product touching parts are made of stainless steel (bucket material: food grade plastic/stainless steel).

技术参数/Technical parameter:

型号/Model	YB-150LD
包装速度/Packing speed	20-40 bags/min
包装范围/Packing range	5-200ml
膜宽/Film width	≤ 280mm
制袋尺寸/Making bag size	L: 50-150mm, W: 15-130mm
功率/Power	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	270kg
机器尺寸/Machine dimension	L2000 × W900 × H1600mm

YB-150S 全自动三角包颗粒包装机 Automatic Triangle Bag Granule Packing Machine



用途: 该机主要用于巧克力豆、妙脆角、锅巴、腰果、花生、豌豆、奶片、糯米团、蜜饯等各类颗粒状产品的三角型包装。

性能特点:

- 1、工作流程: 量杯计量—打码(选配)—制袋—灌装—充气(选配)—封口—计数。
- 2、电脑/PLC控制, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、整机外壳和接触物料部分由不锈钢材料制成(量杯材质: 尼龙/不锈钢)。

Usage:

This machine is mainly used for triangle packaging chocolate beans, bugles, rice crust, cashew nuts, peanuts, peas, milk tablet, glutinous rice ball, sweetmeat and other kinds of granular products.

Function and features:

1. Workflow: cup volumetric filler measuring→coding (optional)→bag making→filling→gas injection (optional)→sealing→counting.
2. Computer/PLC control, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Machine body and product touching parts are made of stainless steel (measuring cup material: nylon/stainless steel).

技术参数/Technical parameter:

型号/Model	YB-150S
包装速度/Packing speed	20-30 bags/min
包装范围/Packing range	5-100ml
膜宽/Film width	≤ 200mm
制袋尺寸/Making bag size	L: 40-150mm, W: 30-90mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.3m ³ /min
功率/Power	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(三角包) Triangle/Pyramid
净重/Net weight	320kg
机器尺寸/Machine dimension	L900 × W700 × H1800mm

YB-2518K 全自动颗粒包装机 Automatic Granule Packing Machine



用途: 该机主要用于包装无粘性、大小均匀的颗粒类产品：如糖、盐、咖啡、调味料、花生、瓜子、谷物、麦片、茶叶、中草药、洗衣粉、干燥剂等。

性能特点:

- 1、工作流程：量杯计量→打码（选配）→制袋→灌装→充气/排气（选配）→封口→计数。
- 2、PLC控制，触摸屏显示，光电跟踪，本机设有故障显示系统，便于操作和维修。
- 3、根据客户需要可订做打圆孔刀座、连包装置、易撕口装置等。
- 4、整机外壳和接触物料部分由304不锈钢材料制作（量杯材质：尼龙/不锈钢）。

Usage:

This machine is mainly used for packaging non-sticky, uniform size of the granular products: such as sugar, salt, coffee, seasoning, peanuts, sunflower seeds, grains, cereals, tea, herbs, washing powder, desiccants, etc.

Function and features:

1. Workflow: cup volumetric filler measuring→coding (optional)→bag making→filling→gas injection/exhaust (optional)→sealing→counting.
2. PLC control, touch screen display, photoelectric tracking, this machine has fault display system, easy to operate and maintain.
3. Can make hole punching blade (round/euro hole), linked bags device or easy tear notch device and so on according to customer's request.
4. Machine body and all product touching parts are made of 304 stainless steel (measuring cup material: nylon/stainless steel).

技术参数/Technical parameter:

型号/Model	YB-2518K
包装速度/Packing speed	30-60 bags/min
包装范围/Packing range	5-200ml
膜宽/Film width	≤ 250mm
制袋尺寸/Making bag size	L: 50-180mm, W: 15-115mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
功率/Power	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	230kg
机器尺寸/Machine dimension	L680 × W730 × H1600mm

YB-2518C 全自动颗粒包装机 Automatic Granule Packing Machine



用途: 该机主要用于包装无粘性、大小均匀的颗粒类产品：如糖、盐、咖啡、调味料、麦片、茶叶、中草药、洗衣粉、干燥剂等。

性能特点:

- 1、工作流程：称重→打码（选配）→制袋→灌装→充气/排气（选配）→封口→计数。
- 2、PLC控制，触摸屏显示，光电跟踪，本机设有故障显示系统，便于操作和维修。
- 3、根据客户需要可订做打圆孔刀座、连包装置、易撕口装置等。
- 4、整机外壳和接触物料部分由304不锈钢材料制作。

Usage:

This machine is mainly used for packaging non-sticky, uniform size of the granular products: such as sugar, salt, coffee, seasoning, cereals, tea, herbs, washing powder, desiccants, etc.

Function and features:

1. Workflow: weighing→coding (optional)→bag making→filling→gas injection/exhaust (optional)→sealing→counting.
2. PLC control, touch screen display, photoelectric tracking, this machine has fault display system, easy to operate and maintain.
3. Can make hole punching blade (round/euro hole), linked bags device or easy tear notch device and so on according to customer's request.
4. Machine body and all product touching parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-2518C
包装速度/Packing speed	15-20 bags/min
包装范围/Packing range	2-65g (颗粒状/granular shape) or 2-30g (条状/stick shape)
膜宽/Film width	≤ 250mm
制袋尺寸/Making bag size	L: 50-180mm, W: 15-115mm
包装精度/Packing accuracy	≤ ± 0.2g (根据物料而定/depends on product)
功率/Power	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	230kg
机器尺寸/Machine dimension	L680 × W730 × H1600mm

YB-280K 全自动颗粒包装机 Automatic Granule Packing Machine



用途: 该机主要用于包装无粘性、大小均匀的颗粒类产品：如糖、盐、咖啡、调味料、花生、瓜子、谷物、麦片、茶叶、中草药、洗衣粉、干燥剂等。

性能特点:

- 1、工作流程：量杯计量→打码（选配）→制袋→灌装→充气/排气（选配）→封口→计数。
- 2、电脑/PLC控制，光电跟踪，设有故障显示系统，便于操作和维修。
- 3、根据客户需要可订做打圆孔刀座、连包装置、易撕口装置等。
- 4、整机外壳和接触物料部分由全不锈钢材料制作（量杯材质：尼龙/不锈钢）。

Usage:

This machine is mainly used for packaging non-sticky, uniform size of the granular products: such as sugar, salt, coffee, seasoning, peanuts, sunflower seeds, grains, cereals, tea, herbs, washing powder, desiccants, etc.

Function and features:

1. Workflow: cup volumetric filler measuring→coding (optional)→bag making→filling→gas injection/exhaust (optional)→sealing→counting.
2. Computer/PLC control, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Can make hole punching blade (round/euro hole), linked bags device or easy tear notch device and so on according to customer's request.
4. Machine body and all product touching parts are made of stainless steel (measuring cup material: nylon/stainless steel).

技术参数/Technical parameter:

型号/Model	YB-280K
包装速度/Packing speed	30-50 bags/min
包装范围/Packing range	10-350ml
膜宽/Film width	≤ 280mm
制袋尺寸/Making bag size	L: 50-280mm, W: 15-130mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
功率/Power	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	300kg
机器尺寸/Machine dimension	L900 × W680 × H1950mm

YB-2818K-4 全自动四列颗粒包装机 Automatic 4 Lanes Granule Packing Machine



用途: 该机主要用于包装小颗粒产品：如糖、盐、咖啡、调味料、板蓝根等。

性能特点:

- 1、工作流程：量杯计量→打码（选配）→制袋→灌装→充气/排气（选配）→封口→计数。
- 2、PLC控制，触摸屏显示，伺服运膜系统；设有故障显示系统，便于操作和维修。
- 3、整机外壳和接触物料部分由304不锈钢材料制作。

Usage:

This machine is mainly used for packaging small granular products: such as sugar, salt, coffee, seasonings, banlangen and so on.

Function and features:

1. Workflow: cup volumetric filler measuring→coding (optional)→bag making→filling→gas injection/exhaust (optional)→sealing→counting.
2. PLC control, touch screen display, servo transport film system; with fault display system for easy operation and maintenance.
3. The whole machine body and product touching parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-2818K-4
列数/Lane number	4
包装速度/Packing speed	80-120 bags/min
包装范围/Packing range	5-30ml
膜宽/Film width	≤ 280mm
制袋尺寸/Making bag size	L: 50-180mm, W: 25-30mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
功率/Power	3.2 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封) Pillow seal
净重/Net weight	400kg
机器尺寸/Machine dimension	L1300 × W1200 × H2400mm

YB-300K 全自动颗粒包装机 Automatic Granule Packing Machine



用途: 该机主要用于包装无粘性、大小均匀的颗粒类产品：如糖、盐、咖啡豆、大米、豆类、花生、瓜子、谷物、坚果、麦片、茶叶、洗衣粉、干燥剂等。

性能特点:

- 1、工作流程：物料提升（选配）→量杯计量→打码（选配）→制袋→灌装→充气/排气（选配）→封口→计数。
- 2、PLC控制，彩色触摸屏显示，光电跟踪，设有故障显示系统，便于操作和维修。
- 3、根据客户需要可订做打孔刀座、插角装置、四头线性称、Z型提升机等。
- 4、整机外壳和接触物料部分由不锈钢材料制作（量杯材质：尼龙/不锈钢）。

Usage:

This machine is mainly used for packaging non-sticky, uniform size of the granular products: such as sugar, salt, coffee beans, rice, beans, peanuts, sunflower seeds, gains, cereals, tea, washing powder, desiccants, etc.

Function and features:

1. Workflow: Product lifting (optional)→cup volumetric filler measuring→coding (optional)→bag making→filling→gas injection/exhaust (optional)→sealing→counting.
2. PLC control, color touch screen display, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Can make hole punching blade, gusset bag device, 4 heads linear weigher, Z type elevator and so on according to customer's request.
4. Machine body and all product touching parts are made of stainless steel (measuring cup material: nylon/stainless steel).

技术参数/Technical parameter:

型号/Model	YB-300K
包装速度/Packing speed	20-50 bags/min
包装范围/Packing range	50-1500ml
膜宽/Film width	≤ 450mm (for pillow seal) ≤ 380mm (for 3/4 sides seal)
制袋尺寸/Making bag size	L: 50-300mm, W: 50-210mm(背封/pillow seal)
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min
功率/Power	1.9 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	360kg
机器尺寸/Machine dimension	L1100 × W800 × H1900mm(不含提升机高度)

YB-300Z10 全自动颗粒包装机 Automatic Granule Packing Machine



用途:

该机主要用于包装无粘性、大小均匀的颗粒、片状、条状产品：如薯片、香蕉片、芒果片、虾条、速冻水饺、速冻丸子、糖、盐、咖啡豆、大米、豆类、花生、瓜子、谷物、坚果、麦片、干燥剂等。

性能特点:

- 1、工作流程：物料提升→组合称计量→打码（选配）→制袋→灌装→充气/排气（选配）→封口→计数→成品输送（可选配）。
- 2、PLC控制，彩色触摸屏显示，光电跟踪，设有故障显示系统，便于操作和维修。
- 3、根据客户需要可订做打孔刀座、插角装置等。
- 4、整机外壳和接触物料部分由不锈钢材料制作。

Usage:

The machine is mainly used for packaging non-sticky, uniform size of the particles, flakes, strip products: such as potato chips, banana chips, mango slices, shrimp, quick-frozen dumplings, quick-frozen balls, sugar, salt, coffee beans, rice, beans, peanuts, sunflower seeds, cereals, nuts, cereals, desiccants and so on.

Function and features:

1. Work flow: material lifting→multi-head weigher measuring→coding (optional)→bag making→filling→gas injection/exhaust (optional)→sealing→counting→conveying finished products (optional).
2. PLC control, color touch screen display, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Can make hole punching blades, gusset bag device and so on according to customer's request.
4. Machine body and all product touching parts are made of stainless steel.

技术参数/Technical parameter:

型号/Model	YB-300Z10
包装速度/Packing speed	20-40 bags/min
包装范围/Packing range	50-1500ml
膜宽/Film width	≤ 450mm (for pillow seal) ≤ 380mm (for 3/4 sides seal)
制袋尺寸/Making bag size	L: 50-300mm, W: 50-210mm (背封/pillow seal)
包装精度/Packing accuracy	0.1-2g/袋(bag)
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min
功率/Power	3.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
主机净重/Main machine net weight	360kg
整体尺寸/Machine dimension	L4500 × W1400 × H4200mm

YB-300LD 链斗式包装机 Bucket Type Packing Machine



用途: 该机主要用于包装大颗粒/片状/不规则产品: 如饼干、薯片、水饺、速冻丸子、豆芽菜、香菇、肉类、五金配件等。

性能特点:

- 1、工作流程: 手工将准备好的产品放入链斗→输送→打码(选配)→制袋→灌装→充气/排气(选配)→封口→计数。
- 2、PLC控制, 触摸屏显示, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、根据客户需要可订做打孔刀座。
- 4、整机外壳和接触物料部分由不锈钢材料制作。

Usage:

This machine is mainly used for packaging large particles/flaky/irregular shape products: such as biscuits, potato chips, dumplings, quick-frozen balls, bean sprouts, mushrooms, meat, hardware accessories and so on.

Function and features:

1. Workflow: Put prepared product into the chain bucket manually→conveying→coding (optional)→bag making→filling→gas injection/exhaust (optional)→sealing→counting.
2. PLC control, touch screen display, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Can make hole punching blades according to customer's request.
4. Machine body and all product touching parts are made of stainless steel.

技术参数/Technical parameter:

型号/Model	YB-300LD
包装速度/Packing speed	15-40 bags/min
包装范围/Packing range	50-1500ml
膜宽/Film width	≤ 450mm
制袋尺寸/Making bag size	L: 50-300mm, W: 50-210mm
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min
功率/Power	1.9 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	背封/Pillow seal
净重/Net weight	400kg
机器尺寸/Machine dimension	L2300 × W1100 × H1900mm

YB-150F/YB-280F 全自动粉剂包装机 Automatic Powder Packing Machine



用途: 该机主要用于包装粉剂类产品: 如奶粉、咖啡粉、胡椒粉、咖喱粉、蛋白质粉、香料、中药粉、化工医药等行业粉状物料。

性能特点:

- 1、工作流程: 螺杆计量→打码(选配)→制袋→灌装→封口→计数。
- 2、电脑/PLC控制, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、可根据客户需要订做打孔刀座: 圆孔/蝴蝶孔, 以及连包装置。
- 4、整机外壳和接触物料部分由不锈钢材料制作。

Usage:

This machine is mainly used for packaging powder products: such as milk powder, coffee powder, spices, curry powder, protein powder, condiment, herbal powder, chemical and medical powder products.

Function and features:

1. Workflow: auger filler measuring→coding (optional)→bag making→filling→sealing→counting.
2. Computer/PLC control, photoelectric tracking, equipped with fault display system, easy to operate and maintain.
3. Make hole punching blade (round/ euro hole) and linked bags device according to customer's request.
4. Machine body and all product touching parts are made of stainless steel.

技术参数/Technical parameter:

型号/Model	YB-150F	YB-280F
包装速度/Packing speed	30-80 bags/min	30-50 bags/min
包装范围/Packing range	5-200ml	10-350ml
膜宽/Film width	≤ 280mm	≤ 280mm
制袋尺寸/Making bag size	L: 50-150mm, W: 15-130mm	L: 50-280mm, W: 15-130mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)	≤ ± 1% (根据物料而定/depends on product)
功率/Power	1.6 KW	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	250kg	300kg
机器尺寸/Machine dimension	L800 × W680 × H1800mm	L800 × W680 × H1900mm

YB-2518F 全自动粉剂包装机 Automatic Powder Packing Machine



用途: 该机主要用于包装粉剂类产品: 如奶粉、咖啡粉、胡椒粉、咖喱粉、蛋白质粉、香料、中药粉、化工医药等行业粉状物料。

性能特点:

- 1、工作流程: 螺杆计量→打码(选配)→制袋→灌装→封口→计数。
- 2、PLC控制, 触摸屏显示, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、可根据客户需要订做打孔刀座: 圆孔/蝴蝶孔, 以及连包装置。
- 4、整机外壳和接触物料部分由304不锈钢材料制作。

Usage:

This machine is mainly used for packaging powder products: such as milk powder, coffee powder, spices, curry powder, protein powder, condiment, herbal powder, chemical and medical powder products.

Function and features:

1. Workflow: auger filler measuring→coding (optional)→bag making→filling→sealing→counting.
2. PLC control, display screen display, photoelectric tracking, equipped with fault display system, easy to operate and maintain.
3. Make hole punching blade (round/ euro hole) and linked bags device according to customer's request.
4. Machine body and all product touching parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-2518F
包装速度/Packing speed	30-50 bags/min
包装范围/Packing range	5-200ml
膜宽/Film width	≤ 250mm
制袋尺寸/Making bag size	L: 50-180mm, W: 15-115mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
功率/Power	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	230kg
机器尺寸/Machine dimension	L680 × W730 × H1700mm

YB-3522F 全自动粉剂包装机 Automatic Powder Packing Machine



用途: 该机主要用于包装粉剂类产品: 如奶粉、咖啡粉、胡椒粉、咖喱粉、蛋白质粉、香料、中药粉、化工医药等行业粉状物料。

性能特点:

- 1、工作流程: 螺杆计量→打码(选配)→制袋→灌装→封口→计数。
- 2、PLC控制, 触摸屏显示, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、可根据客户需要订做打孔刀座: 圆孔/蝴蝶孔, 以及连包装置。
- 4、整机外壳和接触物料部分由304不锈钢材料制作。

Usage:

This machine is mainly used for packaging powder products: such as milk powder, coffee powder, spices, curry powder, protein powder, condiment, herbal powder, chemical and medical powder products.

Function and features:

1. Workflow: auger filler measuring→coding (optional)→bag making→filling→sealing→counting.
2. PLC control, touch screen display, photoelectric tracking, equipped with fault display system, easy to operate and maintain.
3. Make hole punching blade (round/euro hole) and linked bags device according to customer's request.
4. Machine body and all product touching parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-3522F
包装速度/Packing speed	20-60 bags/min
包装范围/Packing range	5-300ml
膜宽/Film width	≤ 350mm
制袋尺寸/Making bag size	L: 50-220mm, W: 15-165mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
功率/Power	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	280kg
机器尺寸/Machine dimension	L780 × W1150 × H1700mm

YB-300F 全自动粉剂包装机 Automatic Powder Packing Machine



用途: 该机主要用于包装粉剂类产品: 如奶粉、面粉、淀粉、咖啡粉、胡椒粉、咖喱粉、蛋白质粉、香料、香精、中药粉、化工医药等行业粉状物料。

性能特点:

- 1、工作流程: 螺杆计量→打码(选配)→制袋→灌装→排气(选配)→封口→计数。
- 2、PLC控制, 触摸屏显示, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、根据客户需要可订做打孔刀座、插角装置。
- 4、整机外壳和接触物料部分由不锈钢材料制作。

Usage:

This machine is widely used for packaging powder products: such as milk powder, flour, starch, coffee powder, spices, curry powder, protein powder, condiment, essence, herbal powder, chemical and medical powder products.

Function and features:

1. Workflow: auger filler measuring→coding (optional)→bag making→filling→exhaust (optional)→sealing→counting.
2. PLC control, touch screen display, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Can make hole punching blade, and gusset bag device according to customer's request.
4. Machine body and all product touching parts are made of stainless steel.

技术参数/Technical parameter:

型号/Model	YB-300F
包装速度/Packing speed	10-40 bags/min
包装范围/Packing range	50-1500ml
膜宽/Film width	≤ 450mm (for pillow seal) ≤ 380mm (for 3/4 sides seal)
制袋尺寸/Making bag size	L: 50-300mm, W: 50-210mm(背封/pillow seal)
包装精度/Packing accuracy	≤ ± 1%(根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min
功率/Power	1.9 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	360kg
机器尺寸/Machine dimension	L1100 × W800 × H1900mm

YB-150J/YB-280J 全自动液/酱体包装机 Automatic Liquid/ Sauce Packing Machine



用途: 该机主要用于番茄酱、辣椒酱、火锅底料、色拉酱、食用油、蜂蜜、酸奶、果汁、酒、醋、洗发水、护发素、面霜、医用和化工液体/酱体的定量包装。

性能特点:

- 1、工作流程: 活塞泵计量→打码 (选配) →制袋→灌装→封口→计数。
- 2、电脑/PLC控制, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、可根据物料特性, 选配物料桶加热、搅拌装置。
- 4、整机外壳和接触物料部分由不锈钢材料制作。

Usage:

This machine is mainly used for quantitative packaging ketchup/tomato sauce, chili sauce, hotpot condiment, salad dressing, cooking oil, honey, yogurt, fruit juice, wine, vinegar, shampoo, hair conditioner, facial cream, medical and chemical liquid/paste.

Function and features:

1. Workflow: piston pump measuring→coding (optional)→bag making→filling→sealing→counting.
2. Computer/PLC control system, photoelectric tracking, equipped with fault display system, easy to operate and maintain.
3. Can choose hopper with heating, mixing device according to different product character.
4. Machine body and all product touching parts are made of stainless steel.

技术参数/Technical parameter:

型号/Model	YB-150J	YB-280J
包装速度/Packing speed	30-80 bags/min	30-50 bags/min
包装范围/Packing range	5-200ml	10-350ml
膜宽/Film width	≤ 280mm	≤ 280mm
制袋尺寸/Making bag size	L: 50-150mm, W: 15-130mm	L: 50-280mm, W: 15-130mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)	≤ ± 1% (根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.3m ³ /min	0.8Mpa, 0.3m ³ /min
功率/Power	1.6 KW	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	250kg	300kg
机器尺寸/Machine dimension	L800 × W680 × H1800mm	L800 × W680 × H1950mm

YB-2518J 全自动液/酱体 Automatic Liquid/Sauce Packing Machine



用途: 该机主要用于番茄酱、辣椒酱、火锅底料、色拉酱、食用油、蜂蜜、酸奶、果汁、酒、醋、洗发水、护发素、面霜、医用和化工液体/酱体的定量包装。

性能特点:

- 1、工作流程: 活塞泵计量→打码(选配)→制袋→灌装→封口→计数。
- 2、PLC控制, 触摸屏显示, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、可根据物料特性, 选配物料桶加热、搅拌装置。
- 4、整机外壳和接触物料部分由304不锈钢材料制作。

Usage:

This machine is mainly used for quantitative packaging ketchup/tomato sauce, chili sauce, hotpot condiment, salad dressing, cooking oil, honey, yogurt, fruit juice, wine, vinegar, shampoo, hair conditioner, facial cream, medical and chemical liquid/paste.

Function and features:

1. Workflow: piston pump measuring→coding (optional)→bag making→filling→sealing→counting.
2. PLC control, touch screen display, photoelectric tracking, equipped with fault display system, easy to operate and maintain.
3. Can choose hopper with heating, mixing device according to different product character.
4. Machine body and all product touching parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-2518J
包装速度/Packing speed	30-50 bags/min
包装范围/Packing range	5-200ml
膜宽/Film width	≤ 250mm
制袋尺寸/Making bag size	L: 50-180mm, W: 15-115mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.3m ³ /min
功率/Power	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	230kg
机器尺寸/Machine dimension	L680 × W730 × H1700mm

YB-300J 全自动液/酱体包装机 Automatic Liquid/ Sauce Packing Machine



用途: 该机主要用于番茄酱、辣椒酱、火锅底料、色拉酱、食用油、蜂蜜、酸奶、果汁、酒、醋、洗发水、护发素、面霜、医用和化工液体/酱体的定量包装。

性能特点:

- 1、工作流程: 活塞泵计量→打码(选配)→制袋→灌装→封口→计数。
- 2、PLC控制, 触摸屏显示, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、可根据物料特性, 选配搅拌装置, 物料桶加热装置。
- 4、整机外壳和接触物料部分由304不锈钢材料制作。

Usage:

This machine is mainly used for quantitative packaging ketchup/tomato sauce, chili sauce, hotpot condiment, salad dressing, cooking oil, honey, yogurt, fruit juice, wine, vinegar, shampoo, hair conditioner, facial cream, medical and chemical liquid/paste.

Function and features:

1. Workflow: piston pump measuring→coding (optional)→bag making→filling→sealing→counting.
2. PLC control, touch screen display, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Can choose hopper with heating, mixing device according to product character.
4. Machine body and all product touching parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-300J
包装速度/Packing speed	10-35 bags/min
包装范围/Packing range	50-1500ml
膜宽/Film width	≤ 450mm (for pillow seal) ≤ 380mm (for 3/4 sides seal)
制袋尺寸/Making bag size	L: 50-300mm, W: 50-210mm (背封/pillow seal)
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min
功率/Power	1.9 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3边/4边/背封) 3/4 sides seal, pillow seal
净重/Net weight	350kg
机器尺寸/Machine dimension	L800 × W1100 × H1950mm

YB-330Y 全自动果冻条包装机 Automatic Liquid Ice Lolly Packing Machine



用途: 该机主要用于果冻条、纯净水、牛奶、酱油、醋以及医用和化工液体的定量包装。

性能特点:

- 1、工作流程: 自流式计量 (电磁阀控制) → 打码 (选配) → 制袋 → 灌装 → 封口 → 计数。
- 2、电脑/PLC控制, 光电跟踪, 设有故障显示系统, 便于操作和维修。
- 3、整机外壳和接触物料部分由不锈钢材料制作。

Usage:

This machine is mainly used for quantitative packaging liquid ice lolly (jelly stick), pure water, milk, soy sauce, vinegar, medical and chemical liquid.


Function and features:

1. Workflow: flow measuring (solenoid valve control) → coding (optional) → bag making → filling → sealing → counting.
2. Computer/PLC control, photoelectric tracking, has fault display system, easy to operate and maintain.
3. Machine body and all product touching parts are made of stainless steel.

技术参数/Technical parameter:

型号/Model	YB-330Y
包装速度/Packing speed	30-60 bags/min
包装范围/Packing range	5-350ml
膜宽/Film width	≤ 280mm
制袋尺寸/Making bag size	L: 50-330mm, W: 15-130mm
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
功率/Power	1.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封/4边封) Pillow seal, 4 sides seal
净重/Net weight	260kg
机器尺寸/Machine dimension	L800 × W680 × H1900mm

YB-4815Y-4/YB-4825Y-4 四列果冻条包装机 Automatic 4 Lanes Liquid Ice Lolly Packing Machine

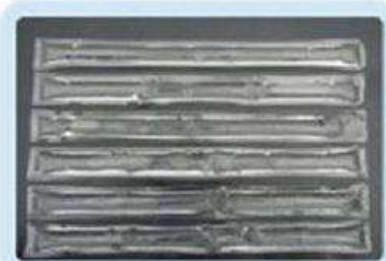

性能特点:

- 1、工作流程: 活塞泵计量→打码 (选配)→制袋→灌装→封口→计数→成品输送。
- 2、PLC控制, 触摸屏显示, 设有故障显示系统, 便于操作和维修。
- 3、整机外壳和接触物料部分由304不锈钢材料制作。

Function and features:

1. Workflow: piston pump measuring→coding (optional)→bag making→filling→sealing→counting→conveying finished products.
2. PLC control, touch screen display, has fault display system, easy to operate and maintain.
3. Machine body and all product touching parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-4815Y-4	YB-4825Y-4
列数/Lane number	4	4
包装速度/Packing speed	120-140 bags/min (depends on product)	80-120 bags/min (depends on product)
膜宽/Film width	≤480mm	≤480mm
制袋尺寸/Making bag size	L: 45-150mm, W: 35-60mm	L: 45-250mm, W: 35-60mm
包装精度/Packing accuracy	≤ ±1% (根据物料而定/depends on product)	≤ ±1% (根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min	0.8Mpa, 0.5m ³ /min
功率/Power	2.8KW	3.0KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
封口类型/Seal type	四边封或背封/4 Sides seal or pillow seal	四边封或背封/4 Sides seal or pillow seal
净重/Net weight	300kg	350kg
机器尺寸/Machine dimension	L950 × W1400 × H1750mm	L950 × W1400 × H1850mm

YB-420L 全自动量杯包装系统 Automatic Cup Volumetric Filler Packing System



用途: 该机主要用于包装颗粒类产品：如糖、盐、咖啡豆、大米、花生、瓜子、谷物、坚果、巧克力豆、麦片、洗衣粉、干燥剂等。

性能特点:

- 1、工作流程：物料提升→量杯计量→打码→制袋→灌装→充气/排气（选配）→封口→计数→成品输出。
- 2、采用PLC伺服和气动控制系统，触摸屏显示，可靠性和智能化程度高，并配备安全防护。
- 3、触摸屏能储存多种不同产品的包装工艺参数，当更换产品时可随时使用无需重新设定。
- 4、设有故障显示系统，出现故障时一目了然，以便及时排除。
- 5、本机外壳为碳钢喷塑（可选配304不锈钢外壳）。

Usage:

This machine is mainly used for packing granular products: such as sugar, salt, coffee beans, rice, peanuts, sunflower seeds, grains, nuts, chocolate beans, oatmeal, washing powder, desiccants, etc.

Function and features:

1. Workflow: material lifting→cup volumetric filler measuring→coding→bag making→filling→gas injection/ exhaust (optional)→sealing→counting→conveying finished products.
2. Adopts PLC servo and pneumatic control system, touch screen display, high reliability and intellectualized degree, and equipped with safety protection.
3. Touch screen can store a variety of different product packaging process parameters, when replacing product, it can be used at any time without resetting.
4. Equipped with fault display system, could be clear at a glance when the fault occurs, in order to be ruled out promptly.
5. This machine body is carbon steel (optional: 304 stainless steel).

技术参数/Technical parameter:

型号/Model	YB-420L
包装速度/Packing speed	10-70 bags/min
包装量/Packing volume	1500ml
制袋尺寸/Making bag size	L: 60-300mm, W: 80-200mm
膜宽/Film width	≤ 420mm
卷膜厚度/Thickness of film roll	0.04-0.09mm
拉膜方式/Pulling film type	(双皮带拉膜) Double belt pull film
耗气量/Air consumption	0.8Mpa, 0.5m³/min
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
主机功率/Main machine power	3.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag
主机净重/Main machine net weight	450kg
主机尺寸/Main machine dimension	L1320 × W920 × H1390mm

YB-520L/YB-720L 全自动量杯包装系统 Automatic Cup Volumetric Filler Packing System



用途: 该机主要用于包装颗粒类产品: 如糖、盐、咖啡豆、大米、豆类、花生、瓜子、谷物、坚果、巧克力豆、麦片、洗衣粉、干燥剂等。

性能特点:

- 1、工作流程: 物料提升→量杯计量→打码→制袋→灌装→充气/排气(选配)→封口→计数→成品输出。
- 2、采用PLC伺服和气动控制系统, 触摸屏构成驱动控制的核心; 可靠性和智能化程度高, 并配备安全防护。
- 3、触摸屏能储存多种不同产品的包装工艺参数, 当更换产品时可随时使用无需重新设定。
- 4、设有故障显示系统, 出现故障时一目了然, 以便及时排除。
- 5、本机外壳为碳钢喷塑(可选配304不锈钢外壳)。

Usage:

This machine is mainly used for packing granular products: such as sugar, salt, coffee beans, rice, beans, peanuts, sunflower seeds, grains, chocolate beans, oatmeal, washing powder, desiccants, etc.

Function and features:

1. Workflow: material lifting→cup volumetric filler measuring→coding→bag making→filling→gas injection/exhaust (optional)→sealing→counting→conveying finished products.
2. PLC servo and pneumatic control system, touch screen forms the core of drive control; high reliability and intellectualized degree, and equipped with safety protection.
3. Touch screen can store a variety of different product packaging process parameters, when replacing product, it can be used at any time without resetting.
4. Equipped with fault display system, could be clear at a glance when the fault occurs, in order to be ruled out promptly.
5. This machine body is carbon steel (optional: 304 stainless steel).

技术参数/Technical parameter:

型号/Model	YB-520L	YB-720L
包装速度/Packing speed	10-60 bags/min	10-55 bags/min
包装量/Packing volume	3500ml	5000ml
制袋尺寸/Making bag size	L: 80-400mm, W: 150-250mm	L: 80-450mm, W: 200-350mm
膜宽/Film width	≤ 520mm	≤ 720mm
卷膜厚度/Thickness of film roll	0.04-0.09mm	0.04-0.09mm
拉膜方式/Pulling film type	(双皮带拉膜) Double belt pull film	(双皮带拉膜) Double belt pull film
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min	0.8Mpa, 0.5m ³ /min
包装精度/Packing accuracy	≤ ±1% (根据物料而定/depends on product)	≤ ±1% (根据物料而定/depends on product)
主机功率/Main machine power	2.5 KW	3.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag
主机净重/Main machine net weight	550kg	700kg
主机尺寸/Main machine dimension	L1500 × W1200 × H1600mm	L1800 × W1250 × H1800mm

YB-420YT/YB-520YT 计量包装一体机 Weighing and packing all-in-one machine



用途: 该机主要用于包装颗粒类产品: 如糖、盐、咖啡豆、大米、豆类、花生、瓜子、谷物、坚果、巧克力豆、薯片/条、速冻水饺、麦片、干燥剂等。

性能特点:

- 1、工作流程: 物料提升 (选配) → 组合秤计量 → 打码 → 制袋 → 灌装 → 充气/排气 (选配) → 封口 → 计数 → 成品输出 (选配) → 成品整理 (选配)。
- 2、采用PLC伺服和气动控制系统, 超大触摸屏构成驱动控制的核心; 可靠性和智能化程度高, 并配备安全防护。
- 3、触摸屏能储存多种不同产品的包装工艺参数, 当更换产品时可随时使用无需重新设定。
- 4、设有故障显示系统, 出现故障, 一目了然, 以便及时排除。
- 5、本机外壳为碳钢喷漆 (可选配304不锈钢外壳)。

Usage:

This machine is mainly used for packing granular products: such as sugar, salt, coffee beans, rice, beans, peanuts, sunflower seeds, grains, nuts, chocolate beans, potato chips/strips, frozen dumplings, cereal, desiccants, etc.

Function and features:

1. Workflow: material lifting (optional) → multi-head weigher measuring → coding → bag making → filling → gas injection/exhaust (optional) → sealing → counting → conveying finished products (optional) → sorting finished products (optional).
2. PLC servo and pneumatic control system, large touch screen forms the core of drive control; high reliability and the intellectualized degree, and equipped with safety protection.
3. Touch screen can store a variety of different product packaging process parameters, when replacing product, it can be used at any time without resetting.
4. Equipped with fault display system, when the fault occurs, it is clear at a glance, in order to be promptly ruled out.
5. This machine body is carbon steel (optional: 304 stainless steel).

技术参数/Technical parameter:

型号/Model	YB-420YT	YB-520YT
包装速度/Packing speed	20-60 bags/min	10-50 bags/min
最大包装量/Max packing volume	2000ml	3500ml
制袋尺寸/Making bag size	L: 60-300mm, W: 80-200mm	L: 80-400mm, W: 150-250mm
膜宽/Film width	≤ 420mm	≤ 520mm
卷膜厚度/Thickness of film roll	0.04-0.09mm	0.04-0.09mm
拉膜方式/Pulling film type	(双皮带拉膜) Double belt pull film	(双皮带拉膜) Double belt pull film
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min	0.8Mpa, 0.5m ³ /min
包装精度/Packing accuracy	≤ ±1% (根据物料而定/depends on product)	≤ ±1% (根据物料而定/depends on product)
主机功率/Main machine power	4.0 KW	4.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag
主机净重/Main machine net weight	450kg	500kg
主机尺寸/Main machine dimension	L1720 × W1030 × H2254mm	L1896 × W1182 × H2430mm

YB-420Z 全自动组合秤包装系统 Automatic Multi-head Weigher Packing System



用途: 该机主要用于包装颗粒类产品: 如糖、盐、咖啡豆、大米、豆类、花生、瓜子、谷物、坚果、巧克力豆、薯片/条、速冻水饺、麦片、干燥剂等。

性能特点:

- 1、工作流程: 物料提升→组合秤计量→打码→制袋→灌装→充气/排气 (选配) →封口→计数→成品输出。
- 2、采用PLC伺服和气动控制系统, 超大触摸屏构成驱动控制的核心; 可靠性和智能化程度高, 并配备安全防护。
- 3、触摸屏能储存多种不同产品的包装工艺参数, 当更换产品时可随时使用无需重新设定。
- 4、设有故障显示系统, 出现故障, 一目了然, 以便及时排除。
- 5、本机外壳为碳钢喷塑 (可选配304不锈钢外壳)。

Usage:

This machine is mainly used for packing granule products: such as sugar, salt, coffee beans, rice, beans, peanuts, sunflower seeds, grains, nuts, chocolate beans, potato chips/strips, frozen dumplings, cereal, desiccants, etc.

Function and features:

1. Workflow: material lifting→multi-head weigher measuring→coding→bag making→filling→gas injection/exhaust (optional)→sealing→counting→conveying finished products.
2. PLC servo and pneumatic control system, large touch screen forms the core of drive control; high reliability and the intellectualized degree, and equipped with safety protection.
3. Touch screen can store a variety of different product packaging process parameters, when replacing product, it can be used at any time without resetting.
4. Equipped with fault display system, when the fault occurs, be clear at a glance, in order to be promptly ruled out.
5. This machine body is carbon steel (optional: 304 stainless steel).

技术参数/Technical parameter:

型号/Model	YB-420Z
包装速度/Packing speed	20-60 bags/min
包装量/Packing volume	2000ml
制袋尺寸/Making bag size	L: 60-300mm, W: 80-200mm
膜宽/Film width	≤ 420mm
卷膜厚度/Thickness of film roll	0.04-0.09mm
拉膜方式/Pulling film type	(双皮带拉膜) Double belt pull film
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
主机功率/Main machine power	2.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag
主机净重/Main machine net weight	450kg
主机尺寸/Main machine dimension	L1320 × W920 × H1390mm

YB-520Z/YB-720Z 全自动组合秤包装系统 Automatic Multi-head Weigher Packing System



用途: 该机主要用于包装颗粒类产品: 如糖、盐、咖啡豆、大米、豆类、花生、瓜子、谷物、坚果、巧克力豆、薯片/条、速冻水饺、麦片、干燥剂等。

性能特点:

- 1、工作流程: 物料提升→组合秤计量→打码→制袋→灌装→充气/排气 (选配)→封口→计数→成品输出→重量检测 (选配)→成品整理 (选配)。
- 2、采用PLC伺服和气动控制系统, 超大触摸屏构成驱动控制的核心; 可靠性和智能化程度高, 并配备安全防护。
- 3、触摸屏能储存多种不同产品的包装工艺参数, 当更换产品时可随时使用无需重新设定。
- 4、设有故障显示系统, 出现故障, 一目了然, 以便及时排除。
- 5、本机外壳为碳钢喷塑 (可选配304不锈钢外壳)。

Usage:

This machine is mainly used for packing granular products: such as sugar, salt, coffee beans, rice, beans, peanuts, sunflower seeds, grains, nuts, chocolate beans, potato chips/strips, frozen dumplings, cereal, desiccants, etc.

Function and features:

1. Workflow: material lifting→multi-head weigher measuring→coding→bag making→filling→gas injection/exhaust (optional)→sealing→counting→conveying finished products→weight checking (optional)→sorting finished products (optional).
2. PLC servo and pneumatic control system, large touch screen forms the core of drive control; high reliability and the intellectualized degree, and equipped with safety protection.
3. Touch screen can store a variety of different product packaging process parameters, when replacing product, it can be used at any time without resetting.
4. Equipped with fault display system, when the fault occurs, be clear at a glance, in order to be promptly ruled out.
5. This machine body is carbon steel (optional: 304 stainless steel).

技术参数/Technical parameter:

型号/Model	YB-520Z	YB-720Z
包装速度/Packing speed	10-60 bags/min	5-55 bags/min
包装量/Packing volume	3500ml	5000ml
制袋尺寸/Making bag size	L: 80-400mm, W: 150-250mm	L: 80-450mm, W: 200-350mm
膜宽/Film width	≤ 520mm	≤ 720mm
卷膜厚度/Thickness of film roll	0.04-0.09mm	0.04-0.09mm
拉膜方式/Pulling film type	(双皮带拉膜) Double belt pull film	(双皮带拉膜) Double belt pull film
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min	0.8Mpa, 0.5m ³ /min
包装精度/Packing accuracy	≤ ±1% (根据物料而定/depends on product)	≤ ±1% (根据物料而定/depends on product)
主机功率/Main machine power	2.5 KW	3.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag
主机净重/Main machine net weight	550kg	700kg
主机尺寸/Main machine dimension	L1500 × W1140 × H1540mm	L1800 × W1250 × H1780mm

YB-420F 全自动立式粉剂包装系统 Automatic Vertical Powder Packing System



用途: 该机主要用于包装粉剂类产品: 如奶粉、面粉、淀粉、咖啡粉、胡椒粉、咖喱粉、蛋白质粉、香料、中药粉、化工医药等行业粉状物料。

性能特点:

- 1、工作流程: 物料提升→螺杆计量→打码→制袋→灌装→封口→计数→成品输出。
- 2、采用PLC伺服和气动控制系统, 超大触摸屏构成驱动控制的核心; 可靠性和智能化程度高, 并配备安全防护。
- 3、触摸屏能储存多种不同产品的包装工艺参数, 当更换产品时可随时使用无需重新设定。
- 4、设有故障显示系统, 出现故障, 一目了然, 以便及时排除。
- 5、本机外壳为碳钢喷塑(可选配304不锈钢外壳)。

Usage:

This machine is widely used for packaging powder products: such as milk powder, flour, starch, coffee powder, spices, curry powder, protein powder, condiment, herbal powder, chemical and medical powder products.

Function and features:

1. Workflow: material lifting→auger filler measuring→coding→bag making→filling→sealing→counting→conveying finished products.
2. PLC servo and pneumatic control system, large touch screen forms the core of drive control; high reliability and intellectualized degree, and equipped with safety protection.
3. Touch screen can store a variety of different product packaging process parameters, when replacing product, it can be used at any time without resetting.
4. Equipped with fault display system, when the fault occurs, be clear at a glance, in order to be promptly ruled out.
5. This machine body is carbon steel (optional: 304 stainless steel).

技术参数/Technical parameter:

型号/Model	YB-420F
包装速度/Packing speed	10-50 bags/min
包装量/Packing volume	2000ml
制袋尺寸/Making bag size	L: 60-300mm, W: 80-200mm
膜宽/Film width	≤ 420mm
卷膜厚度/Thickness of film roll	0.04-0.09mm
拉膜方式/Pulling film type	(双皮带拉膜) Double belt pull film
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
主机功率/Main machine power	2.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag
主机净重/Main machine net weight	450kg
主机尺寸/Main machine dimension	L1320 × W920 × H1390mm

YB-520F/YB-720F 全自动立式粉剂包装系统 Automatic Vertical Powder Packing System



用途: 该机主要用于包装粉剂类产品：如奶粉、面粉、淀粉、咖啡粉、胡椒粉、咖喱粉、蛋白质粉、香料、中药粉、化工医药等行业粉状物料。

性能特点:

- 1、工作流程：物料提升→螺杆计量→打码→制袋→灌装→封口→计数→成品输出。
- 2、采用PLC伺服和气动控制系统，超大触摸屏构成驱动控制的核心；可靠性和智能化程度高，并配备安全防护。
- 3、触摸屏能储存多种不同产品的包装工艺参数，当更换产品时可随时使用无需重新设定。
- 4、设有故障显示系统，出现故障，一目了然，以便及时排除。
- 5、本机外壳为碳钢喷塑（可选配304不锈钢外壳）。

Usage:

This machine is widely used for packaging powder materials: such as milk powder, flour, starch, coffee powder, spices, curry powder, protein powder, condiment, herbal powder, chemical and medical powder products.

Function and features:

1. Workflow: material lifting→auger filler measuring→coding→bag making→filling→sealing→counting→conveying finished products.
2. PLC servo and pneumatic control system, large touch screen forms the core of drive control; high reliability and the intellectualized degree, and equipped with safety protection.
3. Touch screen can store a variety of different product packaging process parameters, when replacing product, it can be used at any time without resetting.
4. Equipped with fault display system, when the fault occurs, be clear at a glance, in order to be promptly ruled out.
5. This machine body is carbon steel (optional: 304 stainless steel).

技术参数/Technical parameter:

型号/Model	YB-520F	YB-720F
包装速度/Packing speed	5-50 bags/min	5-40 bags/min
包装量/Packing volume	3500ml	5000ml
制袋尺寸/Making bag size	L: 80-400mm, W: 150-250mm	L: 80-450mm, W: 200-350mm
膜宽/Film width	≤ 520mm	≤ 720mm
卷膜厚度/Thickness of film roll	0.04-0.09mm	0.04-0.09mm
拉膜方式/Pulling film type	(双皮带拉膜) Double belt pull film	(双皮带拉膜) Double belt pull film
耗气量/Air consumption	0.8Mpa, 0.5m ³ /min	0.8Mpa, 0.5m ³ /min
包装精度/Packing accuracy	≤ ±1% (根据物料而定/depends on product)	≤ ±1% (根据物料而定/depends on product)
主机功率/Main machine power	2.5 KW	3.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag
主机净重/Main machine net weight	550kg	700kg
主机尺寸/Main machine dimension	L1500 × W1140 × H1540mm	L1800 × W1250 × H1780mm

YB-420J 全自动酱体包装机 Automatic Sauce Packing Machine



用途: 该机主要用于番茄酱、辣椒酱、火锅底料、色拉酱、食用油、蜂蜜、酸奶、果汁、酒、醋、医用和化工液体/酱体的定量包装。

性能特点:

- 1、机器性能稳定、操作简单，易清洗。
- 2、整机外壳和接触物料部分为304不锈钢，零部件耐酸碱、耐腐蚀、耐高温。
- 3、采用PLC伺服和气动控制系统，超大触摸屏构成驱动控制的核心；可靠性和智能化程度高，并配备安全防护。

Usage:

This machine is mainly used for quantitative packaging ketchup/tomato sauce, chili sauce, hotpot condiment, salad dressing, cooking oil, honey, yogurt, fruit juice, wine, vinegar, medical and chemical liquid/paste.

Function and features:

1. Machine performance is stable, simple to operate, easy to clean.
2. Machine body and product contacting parts are made of 304 stainless steel, parts resistant to acid and alkali, corrosion resistance, high temperature resistance.
3. PLC servo and pneumatic control system, large touch screen forms the core of drive control; high reliability and intellectualized degree, and equipped with safety protection.

技术参数/Technical parameter:

型号/Model	YB-420J
包装速度/Packing speed	10-50 bags/min
包装量/Packing volume	2000ml
制袋尺寸/Making bag size	L: 60-300mm, W: 80-200mm
膜宽/Film width	≤ 420mm
卷膜厚度/Thickness of film roll	0.04-0.09mm
拉膜方式/Pulling film type	(双皮带拉膜) Double belt pull film
耗气量/Air consumption	0.8Mpa, 0.8m³/min
包装精度/Packing accuracy	≤ ± 1% (根据物料而定/depends on product)
主机功率/Main machine power	2.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(背封袋, 插角袋, 盒式袋) Pillow seal, Gusset bag, Block bottom bag
主机净重/Main machine net weight	450kg
主机尺寸/Main machine dimension	L1320 × W920 × H1390mm



用途: 该机适用于要求计量精度高及易碎的散装物体的各种预制袋包装，如：膨化食品、锅巴、果冻、糖果、开心果、花生、干果片、水饺、汤圆、药材、蔬菜等。

性能特点:

- 1、PLC伺服和气动控制系统，超大触摸屏构成驱动控制的核心；可靠性和智能化程度高，并配备安全防护。
- 2、采用高精度伺服真空运膜系统，运膜平稳，配合光电自动定位跟踪，定位精度高。

Usage:

The machine is suitable for a variety of premade bags that require high precision and fragile bulk objects, such as: puffed food, pots, jelly, candy, pistachio, peanuts, dried fruits, dumplings, herbs, vegetables, etc.

Function and features:

1. PLC servo and pneumatic control system, large touch screen forms the core of drive control; high reliability and the intellectualized degree, and equipped with safety protection.
2. Adopts high-precision servo vacuum film transport system, more stable, with automatic positioning and tracking, high positioning accuracy.

技术参数/Technical parameter:

型号/Model	YB-4030	YB-4030S
工位/Station	1	2
包装速度/Packing speed	12-18 bags/min	15-36 bags/min
包装量/Packing volume	150-2500ml (根据物料而定/depends on product)	
包装尺寸/Bag size	L: 150-400mm, W: 130-300mm	
包装方式/Packing type	背封袋，自立袋，3边封，4边封/Pillow type bag, stand up bag, 3 sides seal bag, 4 sides seal bag	
卷膜厚度/Thickness of film roll	0.04-0.12mm	
耗气量/Air consumption	0.7Mpa, 0.5m ³ /min	0.75Mpa, 0.7m ³ /min
主机功率/Main machine power	1.2 KW	2.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	150kg	300kg
机器尺寸/Machine dimension	L1680 × W510 × H1500mm	L1680 × W970 × H1500mm

**用途与特点:**

该机用于检测单个产品重量与设定数值是否相符，并由分选装置自动剔除不符合标准的产品。

- 1、整机外壳由全不锈钢材料制作，PLC控制系统，触摸屏显示。
- 2、采用世界先进高速数字信号处理技术。
- 3、信息预设可达100条，方便编辑和储存。2000条分选日志，可以快速查询和打印。

Usage and features:

This machine is used to detect whether the weight of a single product accord with the preset number, and weed out the substandard product by sorting device automatically.

1. The whole machine body is made of stainless steel, PLC control system and touch screen display.
2. Adopts world's advanced high-speed digital signal processing technology.
3. Can preset up to 100 pieces information, convenient to edit and store. 2000 pieces articles, can query and print quickly.

技术参数/Technical parameter:

型号/Model	YB-XBC
称重范围/Weighing range	10-1500g or 50-3000g
检测速度/Detecting speed	30-80 pieces/min (可调/adjustable)
皮带宽度/Belt width	300mm
剔除装置/Rejection device	空气喷射/气动臂/气动推杆。 Air injection/pneumatic arm/pneumatic draw stem
耗气量/Air consumption	0.8Mpa, 0.3m ³ /min
功率/Power	200W
电源/Power supply	1Ph. 220V, 50/60Hz
机器重量/Machine weight	100kg
机器尺寸/Machine dimension	L850mm × W520mm × H1350mm

**性能特点:**

1. 采用先进的32位高速处理芯片。
2. 大尺寸触摸屏显示和高性能操作系统。
3. 多功能和人性化操作界面。
4. 中/英文操作语言选择。
5. 大容量的产品储存和异常记录。
6. 全数字信号处理和传输。
7. 全新设计的高防护等级不锈钢机架。

Function and features:

1. The use of advanced 32-bit high-speed processing chip.
2. Large-size touch screen display and high-performance operating system.
3. Multi-function and user-friendly interface.
4. Chinese / English operating language selection.
5. Large-capacity product storage and abnormal records.
6. All digital signal processing and transmission.
7. Newly designed high degree of protection for stainless steel racks.

技术参数/Technical parameter:

型号/Model	YB-J4015	YB-J5045
探测炉尺寸/Detection furnace size	W400mm, H150mm	W500mm, H450mm
有效检测宽度/Effective detection width	350mm	450mm
产品有效通过高度/Effective pass height of product	120mm	420mm
皮带宽度/Belt width	330mm	430mm
检测速度/Detecting speed	18-36m/min	18-36m/min
检测灵敏度/Detect sensitivity	Fe Φ 1mm, SUS Φ 2mm	Fe Φ 1.5-2.5mm, SUS Φ 3-4mm
功率/Power	100W	150W
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
机器重量/Machine weight	200kg	280kg
机器尺寸/Machine dimension	L1500mm \times W900mm \times H800mm	L1800mm \times W1100mm \times H900mm

YB-180C 全自动袋泡茶包装机 Automatic Tea Bag Packing Machine



用途: 用于包装茶叶、中草药、咖啡等。

性能特点:

- 1、PLC控制，触摸屏显示，量杯计量（可选配电子称计量），该机是最新款多功能袋泡茶包装机。
- 2、一次性完成内外袋包装，避免用手直接接触物料。
- 3、内袋为食品级过滤纸，与棉线、标签自动粘合在一起，外袋由可热封的复合膜制成。
- 4、机器外壳及接触物料部分由304不锈钢材料制成。

Usage:

Used for packing tea, Chinese herbs, coffee, etc.

Features and function:

1. PLC control, touch screen display, cup volumetric filler measurement (optional: electronic scales measurement), this machine is the latest type of multi-functional tea bag packaging machine.
2. One-time complete inner and outer bag packing, to avoid contacting with the product by hand directly.
3. Inner bag is food grade filter paper, which is automatically bonded with the cotton thread and the label, and the outer bag is made of a heat-sealable composite film.
4. Machine body and product touching parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-180C
包装速度/Packing speed	20-60 bags/min
包装重量/Packing weight	1-15g (根据物料而定/depends on product)
内袋尺寸/Inner bag size	宽Width 40-80mm, 长length 50-70mm
外袋尺寸/Outer bag size	宽Width 60-90mm, 长length 70-120mm
外袋膜宽/Outer bag film width	≤ 180mm
标签展开尺寸/Tag unfolding size	宽Width 40-50mm, 长length 20-25mm
线长/Thread length	155mm
包装精度/Packing accuracy	≤ ±1% (根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.3m³/min
功率/Power	3.7 KW
电源/Power supply	1Ph. 220V, 50/60Hz
封口类型/Seal type	(3/4边封) 3/4 sides seal
净重/Net weight	450kg
机器尺寸/Machine dimension	L1200 × W900 × H1900mm

YB-180CS 尼龙三角包茶叶包装机 Nylon Triangle Tea Bag Packing Machine



用途: 该机主要用于将各种茶叶、咖啡、中草药进行包装。

性能特点:

- 1、该机可用于背封袋、三角立体袋包装形式。
- 2、PLC控制，触摸屏显示，操作简单、便于调整。
- 3、袋长采用伺服电机驱动，定位准确，调机方便；封口采用进口超声波，性能稳定。
- 4、机器外壳及接触物料部分由304不锈钢材料制成。

Usage:

This machine is mainly used for packaging for various tea, coffee, herbal tea, etc.


Features and function:

1. The machine can be used for pillow bags, triangular bags packaging.
2. PLC control, touch screen display, simple to operate, easy to adjust.
3. Bag length using servo motor drive, positioning accuracy, easy to adjust machine; the sealing use imported ultra-sound, stable performance.
4. Machine body and product contact parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-180CS
包装速度/Packing speed	15-30 bags/min
包装重量/Packing weight	1-7g (根据物料而定/depends on product)
袋子尺寸/Bag size	L 40-80mm W 60-80mm
尼龙膜宽/Nylon film width	120/140/160mm
线长/Thread length	120/170mm
包装精度/Packing accuracy	≤ ±3% (根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.3m³/min
功率/Power	2.2 KW
电源/Power supply	1Ph. 220V, 50/60Hz
包装类型/Packing type	三角包/Triangle type bag
净重/Net weight	650kg
机器尺寸/Machine dimension	L1350 × W1400 × H2400mm

YB-YBC10 全自动圆饼咖啡包装机 Automatic Coffee Pod Packing Machine

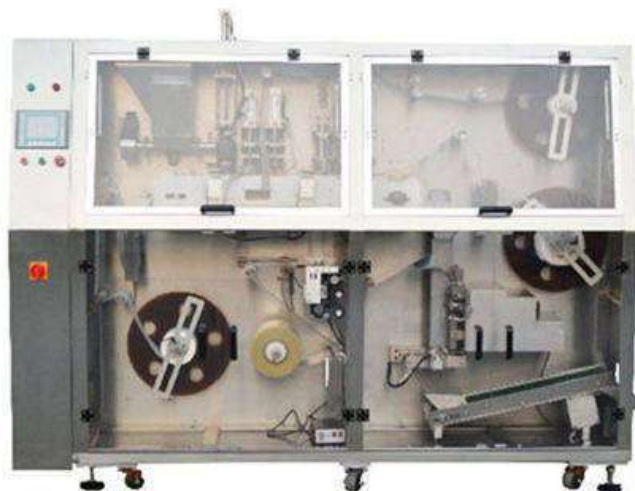

用途: 本机适用于咖啡粉、茶粉、草药粉等微小颗粒的包装。

性能特点:

1. 本机具有自动完成产品的计量、充填、压模、封合、分切内袋、入外袋、包装等功能。
2. 采用精密的控制系统调整整机的动作，PLC控制、触摸屏显示，操作方便。
3. 内袋袋长采用伺服电机驱动，定位准确。
4. 机器外壳及接触物料部分由304不锈钢材料制成。

Usage:

This machine is suitable for packing coffee powder, tea powder, herbal powder and other small particles.

Features and function:

1. This machine has the function of product measuring, filling, stamping mold, sealing, cutting inner bag, fill into outer bag, packaging, and so on.
2. Use sophisticated control system to adjust the machine's action, PLC control, touch screen display, easy to operate.
3. Inner bag length using servo motor drive, accurate positioning.
4. Machine body and product contacting parts are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-YBC10
包装速度/Packing speed	5-15 bags/min
包装重量/Packing weight	5-10g (根据物料而定/depends on product)
过滤纸膜宽/Filter paper width	Max 100mm
外袋膜宽/Outer bag film width	Max 220mm
包装精度/Packing accuracy	$\leq \pm 3\%$ (根据物料而定/depends on product)
耗气量/Air consumption	0.8Mpa, 0.3m ³ /min
功率/Power	2.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	1500kg
机器尺寸/Machine dimension	L2500 × W850 × H1800mm

半自动称重机 Semi-automatic Weighting and Filling Machine



用途: 该机适用于对中小颗粒产品的称重灌装：如白糖、盐、咖啡、大米、豆类、谷物、调味料、茶叶、洗衣粉、干燥剂等。

性能特点:

- 1、对包装容器不限制，光电感应或脚踏开关控制下料。
- 2、采用直接称重式，计量精度高，稳定性强。
- 3、设计成振动给料，结构简单，维护方便，故障率低。
- 4、精密电脑控制系统，触摸屏显示。
- 5、该机可以单独工作，也可以配合提升机使用。
- 6、机器外壳及接触物料部分由304不锈钢制成。

Usage:

This machine is suitable for weighing and filling small and medium granular products: such as sugar, salt, coffee, rice, beans, cereals, seasonings, tea, detergent powder, desiccant and so on.

Features and function:

1. No limit for packaging container, photoelectric sensor or foot switch control.
2. Use direct weighting type, high measuring accuracy, and strong stability.
3. Designed for vibration feeding, simple structure, easy maintenance, and low failure rate.
4. Sophisticated computer control, touch screen display.
5. This machine can work alone; also can be used with elevator.
6. Machine body and product contacting products are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-C1	YB-C2	YB-C6	YB-C10
包装速度/Packing speed	15-22 bags/min	10-21 bags/min	6-12 bags/min	6-12 bags/min
包装范围/Packing range	100g-1kg	200g-2kg	500g-6kg	2kg-10kg
灌装精度/Filling accuracy	$\leq \pm 1g$	$\leq \pm 2g$	$\leq \pm 4g$	$\leq \pm 8g$
功率/Power	250 W			
电源/Power supply	1Ph. 220V, 50/60Hz			
净重/Net weight	150kg	150kg	180kg	200kg
机器尺寸/Machine dimension	L700 × W800 × H1800mm	L700 × W850 × H1800mm	L800 × W850 × H2150mm	L910 × W860 × H2350mm



用途: 该机适用于对粉剂产品的计量灌装：如面粉、奶粉、淀粉、咖啡粉、胡椒粉、咖喱粉、蛋白质粉、香料、草药粉等。

性能特点:

- 1、对包装容器不限制，脚踏开关控制下料。
- 2、采用螺杆计量方式，精度高，稳定性强。
- 3、机器结构简单，维护方便，故障率低。
- 4、该机可以单独工作，也可以配合提升机使用。
- 5、机器外壳及物料接触部分由304不锈钢材料制成。

Usage:

This machine is suitable for measuring and filling powder products: such as flour, milk powder, starch, coffee powder, spices, curry powder, protein powder, condiment, herbal powder, etc.

Features and function:

1. No limit of packaging container, foot switch control.
2. Adopts auger filler measuring method, high accuracy, and strong stability.
3. Simple structure, easy maintenance, low failure rate.
4. This machine can work alone; also can be used with elevator.
5. Machine body and product touching products are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-BF
灌装速度/Filling speed	5-30 times/min
灌装范围/Filling range	10g-3000g (需更换相应螺杆/ need to change auger accordingly)
灌装精度/Filling accuracy	$\leq \pm 1\%$ (根据物料而定/depends on product)
功率/Power	250 W
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	150kg
机器尺寸/Machine dimension	L680 × W650 × H1500mm



用途及特点:

该机适用于糖果、巧克力、牛肉粒、薯片、锅巴、虾条、塑料、小五金以及各类食品和医药化工等颗粒类产品的自动输送。

- 1、通过链斗提升物料至立式包装机/电子称，可实现物料满仓时自动停止、缺料时自动开启输送的功能。
- 2、该机的整体高度根据包装机高度而定。
- 3、机械外壳可选择碳钢喷塑或304不锈钢材料制作(料斗材料均为食品级塑料聚丙PP)。

Usage and features:

This machine is suitable for automatic transporting of candies, chocolate, beef granules, potato chips, rice crust, shrimp strips, plastic, small hardware, and various food, medical and chemical granule products.

1. Lifting products to vertical packaging machine/electronic scale by chain bucket, it can realize auto stopping when full products and auto starting when lack products.
2. The machine's overall height is made according to packing machine's height.
3. Machine body can be made of carbon steel or 304 stainless steel. (Material bucket is made of food grade plastic PP).

YB-LT3/YB-LT5 螺杆粉剂提升机 Screw Conveyor/Elevator for Powder



用途与特点:

- 1、采用双电机：上料电机和振动电机，各自独立控制。
- 2、振动式料箱且幅度可调，料箱设计成分离式，装卸容易。
- 3、螺旋可以反转排料、方便清理。
- 4、该机的整体高度根据包装机高度而定。
- 5、机器外壳及接触物料部分由304不锈钢材料制成。


Usage and features:

1. Adopts double motors: feeding motor and vibration motor, independent control.
2. Vibration type material hopper, and adjustable amplitude, the hopper is designed to be separate type, easy assembling and dismantle.
3. Spiral can reverse to discharge material, convenient cleaning.
4. The machine's overall height is made according to packing machine's height.
5. Machine body and product touching product are made of 304 stainless steel.

技术参数/Technical parameter:

型号/Model	YB-LT3	YB-LT5
上料速度/Feeding speed	3m ³ /h	5m ³ /h
料箱容积/Material hopper volume	230L	300L
电源/Power supply	3Ph. 380V, 50/60Hz	3Ph. 380V, 50/60Hz
功率/Power	900 W	1600 W
机器重量/ Machine weight	150kg	180kg
机器尺寸/Machine dimension	L1000 × W800 × H2100mm	L1050 × W850 × H2100mm

YB-F5000 螺杆计量机 Screw Dosing Machine

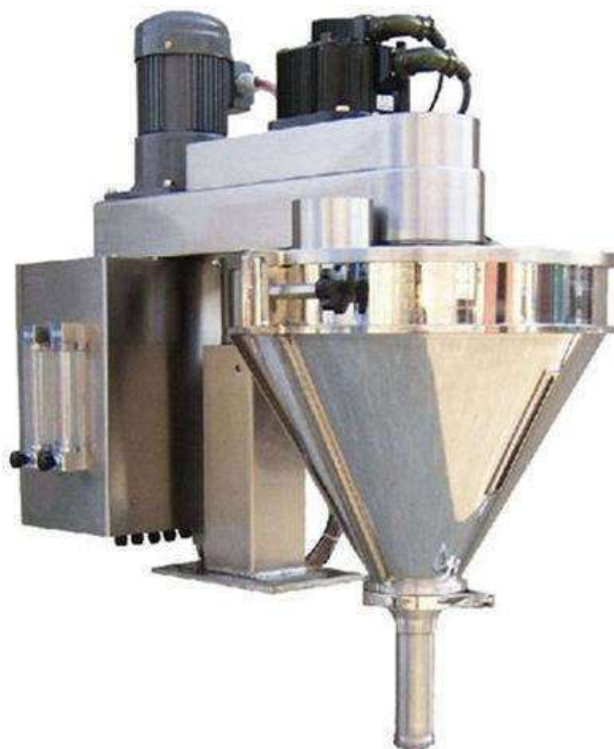

用途及特点:

该机与包装机/灌装机配套使用, 适用于奶粉、咖啡粉、酵母粉、白砂糖、葡萄糖、味精、固体饮料、添加剂、碳粉、爽身粉、香料香精、兽药、农药、洗衣粉等粉剂或细颗粒产品的计量。

- 1、充填采用伺服电动螺旋, 具有定位准确、精度高、速度快、寿命长、转速可设定、稳定性好等优点。
- 2、由全密封有机玻璃和不锈钢组成, 对开式料箱, 粉尘不外泄, 方便清洗。
- 3、充填出口可配备吸尘装置。
- 4、整机外壳和接触物料部分由304不锈钢制作, 油压升降, 符合GMP要求。

Usage and features:

This machine works with packing machine/filling machine, suitable for milk powder, coffee powder, yeast, sugar, glucose, MSG, solid beverage, additives, toner, talcum powder, flavors, veterinary medicine, pesticide, detergent powder and other powder or fine particle products measurement.

1. The filling adopts servo motor spiral, has advantages of accurate positioning, superior precision, high speed, long life, settable rotational speed, and good stability.
2. Made of complete sealed organic plexiglass and stainless steel, to open hopper, powder does not leak, easy to clean.
3. Powder outlet can be equipped with suction device.
4. Machine body and product contacting parts are made of 304 stainless steel, hydraulic movements, meets the requirements of GMP.

技术参数/Technical parameter:

型号/Model	YB-F5000
计量方式/Measuring type	螺旋旋转充填式/Spiral rotary filling type
计量范围/Measuring range	100g-5000g (需更换相应螺杆/ need to change auger accordingly)
计量精度/Measuring accuracy	$\leq \pm 1\%$ (根据物料而定/depends on product)
下料速度/Filling speed	20-80 times/min
电源/Power supply	3Ph. 380V, 50/60Hz
功率/Power	2.3 KW
机器重量/Machine weight	150kg
机器尺寸/Machine dimension	L1030 × W700 × H1100mm (不含螺杆长度/Withou screw length)

YB-CS200/YB-CS300/YB-CS400 成品输送机 Finished Product Conveyor



用途与特点:

本机采用微型电动机传动，具有噪音低、输送平稳、寿命长等特点，可将成品输送至工作平台。机器外壳由不锈钢材料制成。

Usage and features:

This machine adopts micro motor drive, has characteristics of low noise, stable conveying, long life, etc, can send the finished products to the working platform. Machine body is made of stainless steel.

技术参数/Technical parameter:

型号/Model	YB-CS200	YB-CS300	YB-CS400
输送带宽度/Conveyor width	200mm	300mm	400mm
输送速度/Transporting speed	15-60 bags/min	15-60 bags/min	15-55 bags/min
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
功率/Power	50W	80W	100W
机器重量/Machine weight	40kg	50kg	65kg

YB-Z10/YB-Z14 组合秤 Multi-head Electronic Weigher



用途与特点:

该机适用于花生、瓜子、果仁、糖果、巧克力、坚果、葡萄干、薯片、虾条、饺子、鱼丸、五金零件等各种颗粒状、片状、条状、不规则物料的定量称重。

- 1、IP65防水防尘全封闭式设计，便于清洁维护。
- 2、可预存99组产品参数，称重不同产品时更为方便。
- 3、全面操作的PC联网监视功能，易于智能化管理和远控服务。
- 4、智能化的故障报警提示，帮助用户快速排除故障。

Usage and features:

This machine is suitable for quantitative weighing peanuts, sunflower seeds, nutlet, candy, chocolate, nuts, raisin, potato chips, shrimp strip, dumplings, fish balls, hardware and various granule/sheet/strip/irregular products.

1. IP65 waterproof and dust-proof design fully enclosed design, easy to clean and maintain.
2. Can store 99 sets of product parameters in advance, so it is more convenient to weight different products.
3. Comprehensive operation of the PC connected monitoring functions, easy for intelligent management and remote control service.
4. Intelligent fault alarm hint to help users quickly troubleshooting.

技术参数/Technical parameter:

型号/Model	YB-Z10		YB-Z14	
称重范围/Weighing range	10-800g	800-1500g	10-800g	800-2000g
称量精度范围/Weighing accuracy range	0.1-1.5g	0.5-2g	0.1-1.5g	0.5-2g
料斗容积/Hopper volume	1600ml	2500ml	1600ml	2500ml
最大称重速度/Maximum weighing speed	65 bags/min	45 bags/min	120 bags/min	80 bags/min
功率/Power	1.5 KW		2.5 KW	
驱动方式/Drive way	步进电机/ Stepping motor			
操作界面/Operate panel	10.4寸彩色触摸屏10.4 touch screen			
选配装置/Options	平板/花纹 (smooth / convex-concave)			
电源/Power supply	1Ph. 220V, 50/60Hz			
机器重量/Machine weight	420kg		480kg	
机器尺寸/Machine dimension	L1500 × W1100 × H1300mm		L1700 × W1300 × H1300mm	

**用途与特点:**

该机适用于白糖、盐、种子、大米、芝麻、味精、咖啡、调味料等较为均匀的小颗粒产品的定量称重。

- 1、PLC 控制系统，彩色触摸屏显示。
- 2、可以同时称量多种不同物料，实现混合物料包装。
- 3、采用无级振动加料系统，使物料更均匀，称重范围更大。
- 4、通过互联网可实现对机器远程监控与跟踪。
- 5、与物料接触部件(储料斗、振盘、称量斗等)可快速拆卸，方便清洁。
- 6、本机外壳全部采用304不锈钢材料制作，干净卫生，符合GMP要求。

Usage and features:

This machine is suitable for quantitative weighing of white sugar, salt, seeds, rice, sesame, MSG, coffee, seasoning and so on small granule products, which are uniform.

1. PLC control system, color touch screen display.
2. Can weight various different products at the same time, to realize mixed products packaging.
3. Adopts stepless vibration loading system, make products evener and weighing scope bigger.
4. Realize remote monitoring and tracking on the machine through internet.
5. The parts touching products (storage hopper, vibration plate, weigher hopper) are easy to dismantle, and convenient to clean.
6. Machine body is made of 304 stainless steel, clean and health, meets requirements of GMP.

技术参数/Technical parameter:

型号/Model	YB-X4	YB-X2
称重范围/Weighing range	10g-2000g	50g-5000g
称重精度/Weighing accuracy	±0.2-2g	±1-5g
称重速度/Weighing speed	10-60 time/min	10-35 time/min
最大称重容量/Max weighing volume	2000ml	5000ml
功率/Power	800 W	950 W
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
机器重量/Machine weight	240kg	250kg
机器尺寸/Machine dimension	L1350 × W945 × H970mm	L1042 × W956 × H1395mm

YB-250 全自动枕式包装机 Automatic Pillow Packing Machine



用途:

该机主要用于包装饼干、面包、巧克力、糖果、蛋黄派、棒棒糖、月饼、雪糕、卡片、湿巾、勺子、牙刷、香皂、清洁球、注射器、五金零件和日用品等形状规则并无粘性的产品。

性能特点:

- 1、PLC控制，彩色触摸屏显示，光电自动快速跟踪。
- 2、双变频控制，设备具有故障报警功能，便于维修。
- 3、整机性能卓越，操作简单。

Usage:

This machine is mainly used for packaging biscuit, bread/bakery, chocolate, sweets, vitelline pie, lollipop, moon cake, ice cream, card, wet tissue, spoon, toothbrush, soap, scourer ball, syringe, hardware, commodity and the products with regular shape and not sticky.

Function and features:

1. PLC control, Color touch screen display, photoelectric automatic fast tracking.
2. Dual-frequency control, machine has fault alarm function, easy maintenance.
3. Machine has excellent performance, simple operation.

技术参数/Technical parameter:

型号/Model	YB-250
包装速度/Packing speed	35-220 bags/min
膜宽/Width of film	90-250 mm
制袋尺寸/Making bag size	双低刀 (Double low cutter) L 65-190, W 30-110, H 5-50 (mm) 双高刀 (Double high cutter) L 90-220, W 30-110, H 5-60 (mm) 单高刀 (Single high cutter) L 150-330, W 30-110, H 5-60 (mm)
功率/Total power	2.4 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	400kg
机器尺寸/Machine dimension	L3800 × W850 × H1500mm

YB-350 全自动枕式包装机 Automatic Pillow Packing Machine



用途:

该机主要用于包装饼干、面包、巧克力、糖果、蛋黄派、棒棒糖、月饼、雪糕、卡片、湿巾、勺子、牙刷、香皂、清洁球、注射器、五金零件和日用品等形状规则并无粘性的产品。

性能特点:

- 1、PLC控制，彩色触摸屏显示，光电自动快速跟踪。
- 2、双变频控制，设备具有故障报警功能，便于维修。
- 3、整机性能卓越，操作简单。

Usage:

This machine is mainly used for packaging biscuit, bread/bakery, chocolate, sweets, vitelline pie, lollipop, moon cake, ice cream, card, wet tissue, spoon, toothbrush, soap, scourer ball, syringe, hardware, commodity and the products with regular shape and not sticky.

Function and features:

1. PLC control, Color touch screen display, photoelectric automatic fast tracking.
2. Dual-frequency control, machine has fault alarm function, easy maintenance.
3. Machine has excellent performance, simple operation.

技术参数/Technical parameter:

型号/Model	YB-350
包装速度/Packing speed	35-180 bags/min
膜宽/Width of film	90-350 mm
制袋尺寸/Making bag size	双低刀 (Double low cutter) L 65-190, W 30-160, H 5-50 (mm) 双高刀 (Double high cutter) L 90-220, W 30-160, H 5-60 (mm) 单高刀 (Single high cutter) L 150-330, W 30-160, H 5-60 (mm)
总功率/Total power	2.4 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	500kg
机器尺寸/Machine dimension	L3800 × W950 × H1500mm

YB-450 全自动枕式包装机 Automatic Pillow Packing Machine



用途:

该机主要用于包装饼干、面包、威化饼、巧克力、方便面、湿巾、肥皂、输液瓶、五金零件和日用品等形状规则并无粘性的产品。

性能特点:

- 1、PLC控制，彩色触摸屏显示，光电自动快速跟踪。
- 2、双变频控制，设备具有故障报警功能，便于维修。
- 3、整机性能卓越，操作简单。

Usage:

This machine is mainly used for packaging biscuit, bread/bakery, wafer, chocolate, instant noodle, wet tissue, soap, infusion bottle, hardware, commodity and the products with regular shape and not sticky.

Function and features:

1. PLC control, Color touch screen display, photoelectric automatic fast tracking.
2. Dual-frequency control, machine has fault alarm function, easy maintenance.
3. Machine has excellent performance, simple operation.

技术参数/Technical parameter:

型号/Model	YB-450
包装速度/Packing speed	35-120 bags/min
膜宽/Width of film	100-450 mm
制袋尺寸/Making bag size	L 150-400, W 50-200, H 10-70 (mm)
总功率/Total power	2.9 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	600kg
机器尺寸/Machine dimension	L4000 × W1000 × H1600mm

YB-600 全自动枕式包装机 Automatic Pillow Packing Machine



用途:

该机主要用于包装饼干、面包、吐司、巧克力、方便面、蛋糕、水果、蔬菜、餐巾纸、书本、百洁布、餐具、一次性杯子、一次性拖鞋、输液瓶、五金零件、纸盒或托盘等各类固态、形状规则的物品。

性能特点:

- 1、PLC控制，彩色触摸屏显示，光电自动快速跟踪。
- 2、双变频控制，设备具有故障报警功能，便于维修。
- 3、整机性能卓越，操作简单。

Usage:

This machine is mainly used for packaging biscuit, bread/bakery, toast, chocolate, instant noodle, cake, fruits, vegetable, napkin, book, scouring pad, tableware, disposable cup, disposable slippers, infusion bottle, hardware, carton box, tray and various solid and regular shape products.

Function and features:

1. PLC control, Color touch screen display, photoelectric automatic fast tracking.
2. Dual-frequency control, machine has fault alarm function, easy maintenance.
3. Machine has excellent performance, simple operation.

技术参数/Technical parameter:

型号/Model	YB-600
包装速度/Packing speed	35-120 bags/min
膜宽/Width of film	100-600 mm
制袋尺寸/Making bag size	L 180-500, W 50-240, H 10-100 (mm)
总功率/Total power	3.6 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	1000kg
机器尺寸/Machine dimension	L4200 × W1200 × H1750mm

YB-250X 下走纸枕式包装机 Bottom Film Pillow Packing Machine



用途:

该机主要用于包装不规则、软的、略微带有粘性的产品：如蜜饯、软糖、蛋糕、湿毛巾、餐具、橡皮泥、脱脂棉、浴帽、玩具、五金配件等。

性能特点:

- 1、PLC控制，彩色触摸屏显示，光电自动快速跟踪。
- 2、双变频控制，设备具有故障报警功能，便于维修。
- 3、整机性能卓越，操作简单。

Usage:

This machine is mainly used for packaging irregular/soft/a little sticky products, such as sweetmeat, soft candy, cake, wet towel, tableware, plasticine, absorbent cotton, shower cap, toy, hardware, etc.

Function and features:

1. PLC control, Color touch screen display, photoelectric automatic fast tracking.
2. Dual-frequency control, machine has fault alarm function, easy maintenance.
3. Machine has excellent performance, simple operation.

技术参数/Technical parameter:

型号/Model	YB-250X
包装速度/Packing speed	35-180 bags/min
膜宽/Width of film	90-250 mm
制袋尺寸/Making bag size	双低刀 (Double low cutter) L 65-190, W 30-110, H 5-50 (mm) 双高刀 (Double high cutter) L 90-220, W 30-110, H 5-60 (mm) 单高刀 (Single high cutter) L 150-330, W 30-110, H 5-60 (mm)
总功率/Total power	2.4 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	400kg
机器尺寸/Machine dimension	L3800 × W850 × H1500mm

YB-350X 下走纸枕式包装机 Bottom Film Pillow Packing Machine



用途:

该机主要用于包装不规则、软的、略微带有粘性的产品，如蜜饯、软糖、蛋糕、湿毛巾、无纺布、百洁布、橡皮泥、脱脂棉、浴帽、玩具、五金配件等。

性能特点:

- 1、PLC控制，彩色触摸屏显示，光电自动快速跟踪。
- 2、双变频控制，设备具有故障报警功能，便于维修。
- 3、整机性能卓越，操作简单。

Usage:

This machine is mainly used for packaging irregular/soft/a little sticky products, such as sweetmeat, soft candy, cake, wet towel, non-woven, tableware, plasticine, absorbent cotton, shower cap, toy, hardware, etc.

Function and features:

1. PLC control, Color touch screen display, photoelectric automatic fast tracking.
2. Dual-frequency control, machine has fault alarm function, easy maintenance.
3. Machine has excellent performance, simple operation.

技术参数/Technical parameter:

型号/Model	YB-350X
包装速度/Packing speed	35-180 bags/min
膜宽/Width of film	90-350 mm
制袋尺寸/Making bag size	双低刀 (Double low cutter) L 65-190, W 30-160, H 5-50 (mm) 双高刀 (Double high cutter) L 90-220, W 30-160, H 5-60 (mm) 单高刀 (Single high cutter) L 150-330, W 30-160, H 5-60 (mm)
总功率/Total power	2.4 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	500kg
机器尺寸/Machine dimension	L3800 × W950 × H1500mm

YB-800 全自动背封糖果包装机 Automatic Pillow Candy Packing Machine



性能特点:

- 1、双变频控制系统，结构简单、磨损少、寿命长。
- 2、整机由电脑/PLC运行控制，人机界面显示，跟踪快速，操作方便。
- 3、机器出现错误时，自动报警，方便维修，安全可靠。
- 4、智能温度控制器，控制精确，调整方便。
- 5、超大理料盘，可实现自动放料，高效率且节省人工。

Function and features:

1. Double frequency converter controller, simple structure, less wear and long life.
2. Computer/ PLC control, human-machine display screen, tracking fast and easy to operate.
3. Automatic alarm when machine has error, convenient maintenance, safe and reliable.
4. Intelligent temperature controller, precise control, easy to adjust.
5. Large feeding plate, can realize auto feeding product, high efficiency and save labor.

技术参数/Technical parameter:

型号/Model	YB-800
包装速度/Packing speed	200-800 pcs/min (根据物料而定/depends on product)
包装膜宽/Width of film	50-120 mm
制袋尺寸/Making bag size	L 40-80mm; W 10-50mm
耗气量/Air consumption	0.8Mpa, 0.3m ³ /min
总功率/Total power	3.4 KW
电源/Power supply	3Ph. 380V, 50/60Hz
净重/Net weight	900kg
机器尺寸/Machine dimension	L3200 × W1060 × H1500mm

YB-600S 全自动双扭结糖果包装机 Automatic Double Twist Candy Packing Machine



性能特点:

该机主要适用于对糖果（长方形、椭圆形、腰圆型、圆柱形、正方形）、巧克力、鱼皮粒、牛肉粒等形状规则的食品进行双扭结包装。

- 1、整理盘自动理料，使用单层或双层包装纸。
- 2、光电自动跟踪，变频调速具有噪音低、寿命长等特点。
- 3、根据不同物料特性，可选配自动下料斗。
- 4、包装材料：玻璃纸、PVC、聚丙烯、蜡纸、复合材料等。

Machine features:

This machine is mainly suitable for double twist packaging of candies (rectangular, oval, circular, cylindrical, square), chocolate, fish skin grain, beef granule and other regular shape foods.

1. Sorting plate feed product automatically, use single or double layer wrapping paper.
2. Automatic photoelectric tracking, speed is adjusted by frequency converter, which has the characteristics of low noise, long service life etc.
3. Can choose automatic hopper for filling according to different product properties.
4. Packaging materials: cellophane, PVC, polypropylene, waxed paper, composite material, etc.

技术参数/Technical parameter:

型号/Model	YB-600S
包装速度/Packing speed	200-600pcs/min (根据物料而定/depends on product)
糖果尺寸/Candy size	L 12-32mm; W 12-26mm; H 8-20mm
耗气量/Air consumption	0.8Mpa, 0.3m ³ /min
总功率/Total power	2.8 KW
电源/Power supply	3Ph. 380V, 50/60Hz
净重/Net weight	1080kg

YB-120 棒棒糖扭结包装机 Automatic Ball Lollipop Wrapping Machine



性能特点:

该机适合球形棒棒糖扭结包装。

- 1、整理盘自动理料，结构设计合理，操作方便、包装密封性好。
- 2、该机技术先进，性能稳定，不仅减少了人工成本，而且提高了糖果的卫生标准和包装质量。
- 3、电脑控制系统设有光电跟踪，当设备开机出现空糖时，能同步停膜，避免浪费。

Machine features:

This machine suits for spherical lollipop twist packaging.

1. Sorting plate feeds product automatically, machine has reasonable structure design, easy to operate and good packing and sealing.
2. This machine has advanced technology, stable performance, it not only reduces the labor cost, but also improves the candy health standard and packing quality.
3. Computer control system is equipped with photoelectric tracking, after turning on machine, when there is no candy, it can stop moving film synchronously, avoid wasting.

技术参数/Technical parameter:

型号/Model	YB-120
棒棒糖直径/Lollipop diameter	20-28 mm
包装速度/Packing speed	60-120 pcs/min(根据糖型及大小而定/Depends on candy shape and size)
耗气量/Air consumption	0.8Mpa, 0.3m ³ /min
总功率/Total power	2.8 KW
电源/Power supply	3Ph. 380V, 50/60Hz
机器重量/Machine weight	1200kg
机器尺寸/Machine dimension	L2500 × W900 × H1500mm

YB-1560B 全自动百褶香皂包装机 Automatic Pleated Soap Packing Machine



用途: 该机主要用于圆形香皂、蓝泡泡的百褶包装。

性能特点:

1. 采用凸轮驱动, 运行稳定, 包装精美并且速度快。
2. PLC控制, 触摸屏显示, 可快速设置参数。
3. 具有故障自我检测功能, 明确显示故障情况。
4. 适用于不干胶标签和透明标签, 自动完成贴标。

Usage:

This machine is mainly used to pleated packing for round soap and toilet bowl solid detergent.

Function and features:

1. Using the cam-driven design, running compact, good packing effect and fast speed.
2. PLC control, touch screen display, can set parameters quickly.
3. Has self-test failure function, show failure clearly.
4. Suits for both self-adhesive label and transparent label, it can finish labeling automatically.

技术参数/Technical parameter:

型号/Model	YB-1560B
包装速度/ Packing speed	30-50 pcs/min
香皂尺寸/Soap size	直径Diameter: 40-60mm, 厚度Thickness: 10-25mm
包装膜尺寸/Film size	宽度Width: 90-150mm, 厚度Thickness: 25-50micron
标签尺寸/Label size	直径Diameter: 20-40mm, 间距Space: 2mm
耗气量/Air consumption	2m ³ /min
功率/Power	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
机器重量/Machine weight	500kg
机器尺寸/Machine dimension	L2550 × W1000 × H1800mm

YB-BJ 半自动液/酱体灌装机 Semi-auto liquid/sauce filling machine



技术参数/Technical parameter:

型号/Model	YB-BJ
灌装量/Filling range	可选Optional 10~100ml; 50~500ml; 100~1000ml; 500~2500ml
灌装速度/Filling speed	10~30 bottles/min
灌装精度/Filling accuracy	$\leq \pm 1\%$ (视物料而定/depends on product)
电压/Voltage	220V, 50/60Hz
机器重量/Machine weight	50kg
机器尺寸/Machine dimension	L1200 x W400mm x H600mm

YB-900S 封口机 Bag sealer

技术参数/Technical parameter:

型号/Model	YB-900S
封口宽度/Sealing width	6~12mm
封口速度/Sealing speed	0~12m/min
载重/Loading weight	$\leq 3\text{kg}$
耗气量/Air consumption	0.8Mpa, 0.3m ³ /min
功率/Power	750W
电源/Power supply	220V, 50/60Hz
温度范围/Temperature range	0~300° C
印字类型/Printing type	钢印/墨轮(steel wheel/ink wheel print)
机器重量/Machine weight	25kg
机器尺寸/Machine size	L810 x W380 x H300mm



YB-5540 2合1收缩机 2-in-1 Shrink wrapping machine



技术参数/Technical parameter:

型号/Model	YB-5540
最大包装尺寸/Max wrapping size	L550mm x W400mm x H300mm
产量/Production capacity	500~800 pcs/h
功率/Power	4KW
电源/Power supply	220~240V, 50/60Hz
机器重量/Machine weight	128kg
机器尺寸/Machine size	L1500 x W700 x H1150mm